


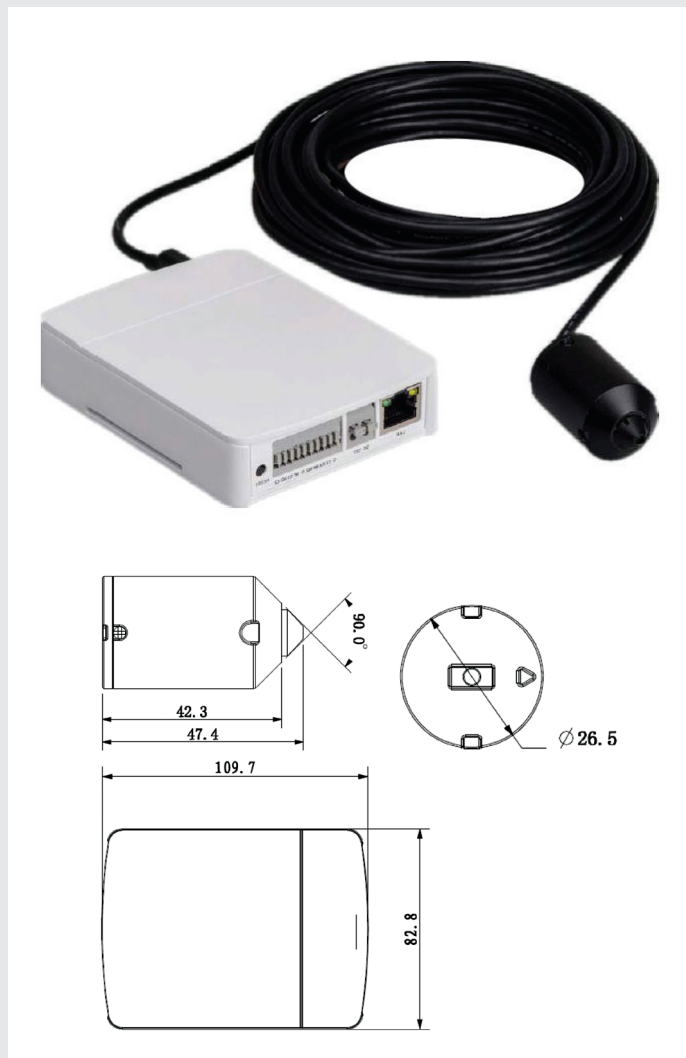

FEATURES

- 1/3" 1.3Megapixel progressive scan CMOS
- H.264 & MJPEG dual-stream encoding
- Max 25/30fps@1.3MP (1280x960)
- Day/Night(Electronic), 3DNR, AWB,AGC,BLC
- Smart detection:
 - Face detection
 - Tripwire detection
 - Intrusion detection
 - Scene change detection
- 3.6mm fixed lens
- Micro SD memory, PoE

TECHNICAL SPECIFICATIONS

Model		MT-IPHUM81P
Camera	Image Sensor	1/3" 1.3Megapixel progressive scan CMOS
	Effective Pixels	1280(H)x960(V)
	Scanning System	Progressive
	Electronic Shutter Speed	Auto/Manual, 1/3~1/10000s
	Min. Illumination	0.01Lux/F2.8 (Color), 0.001Lux/F2.8(B/W)
	S/N Ratio	More than 50dB
Camera Features	Day/Night	Auto(Electronic)/Color/B/W
	Backlight Compensation	BLC / HLC/WDR(100dB)
	White Balance	Auto/Manual
	Gain Control	Auto/Manual
	Noise Reduction	3D
	Privacy Masking	Up to 4 areas
Lens	Focal Length	3.6mm
	Max Aperture	F2.8
	Focus Control	Manual
	Angle of View	77°
	Lens Type	Fixed lens
	Mount Type	Board-in Type
Video	Compression	H.264/MJPEG
	Resolution	1.3M(1280×960)/720P(1280×720)/D1(704×576)/CIF(352×288)
	Frame Rate	Main Stream 1.3M/720P(1 ~ 25/30fps) Sub Stream D1/CIF(1 ~ 25/30fps)
	Bit Rate	H.264: 48K ~ 8192Kbps
Audio	Compression	G.711a / G.711u/PCM
	Interface	1/1 channel In/Out
Smart Function	Smart detection	Tripwire
		Intrusion
		Scene change
		Missing/Abandoned
		Audio detect
		Face detect
Network	Ethernet	RJ-45 (10/100/1000Base-T)
	Protocol	IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour
	Compatibility	ONVIF, PSIA, CGI
	Max. User Access	20 users
	Smart Phone	iPhone, iPad, Android, Windows Phone
Auxiliary Interface	Memory Slot	Micro SD, Max 64GB
	Alarm	1/1 channel In/Out
General	Power Supply	DC12V, PoE (802.3af)
	Power Consumption	Max 7W
	Working Environment	-30°C~+60°C, Less than 95% RH
	Dimensions	109.7mm×82.8mm×24.0mm
	Weight	0.46kg