




### FEATURES

- Displayer: Color 7-inch TFT LCD, Capacitive touch screen resolution 800×480
- Support 6 channels wire alarm input
- Call among households
- 1 channel 10/100Mbps self-adaptive Ethernet
- Support outdoor station and IPC monitor
- Support leave audio and video message
- Support special POE power supply
- Support SD card pluggable
- Surface mounted

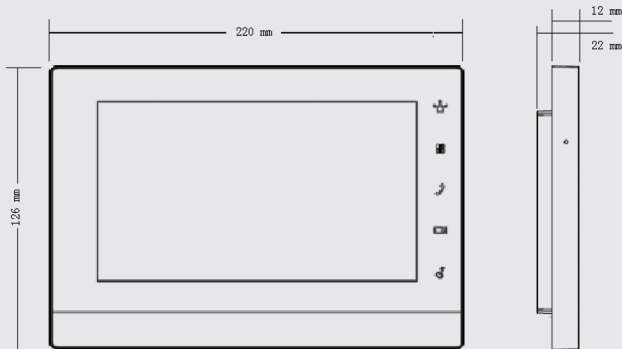

### TECHNICAL SPECIFICATIONS

Model		MT-VTH1550	
System	Main Processor	Built-in microcontroller	
	Operation System	Embedded LINUX operating system	
Video	Compression	H.264	
	Resolution	800*480	
Audio	Audio Input	All-direction microphone	
	Audio Output	Embedded loudspeaker	
	Bidirectional Talk	Support bidirectional talk	
Display	Size	Color 7-inch TFT LCD	
Operation Mode	Input	Mechanical keys (emergency, protection, video talk, monitoring, unlock), Touch screen technology	
Alarm	Alarm input	Support 6 channels input	
	Alarm output	Support 1 channel output	
Network	Ethernet	10 M / 100 Mbps adaptive	
	Network Protocol	TCP/IP	
General	Power	DC 10~15V or supply directly by Special switching power	
	Power Consumption	Standby ≤1.5W, work≤7W	
	Working Environments	Temperature	-10°C~+60°C
		Humidity	10~90%RH
	Dimensions	200mm×126mm×22mm(L*W*T)	
Weight	0.8Kg		