




FEATURES

- 1/2.7" 4Megapixel progressive scan CMOS
- Day/Night(Electronic), WDR
- 2.8mm Fixed Pinhole Lens
- 8-meters cable
- Require a Main Box to work together

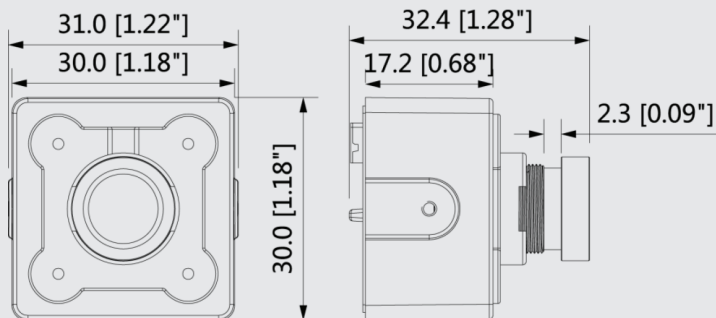

TECHNICAL SPECIFICATIONS

Model		MT-IPHUM84S2	
Camera	Image Sensor	1/2.7" 4Megapixel progressive scan CMOS	
	Scanning System	Progressive	
	Effective Pixels	1920(H)x1080(V)	
	Minimum Illumination	0.005Lux/F2.2 (Color, 1/3s, 30IRE) 0.05Lux/F2.2 (Color, 1/30s, 30IRE) 0.003Lux/F2.2 (B/W, 1/3s, 30IRE) 0.03Lux/F2.2 (B/W, 1/30s, 30IRE)	
Lens	Lens Type	Fixed	
	Mount Type	Board-in	
	Focal Length	2.8mm	
	Max. Aperture	F2.2	
	Angle of View	H:104° ,V:54°	
	Focus Control	Fixed	
	Close Focus Distance	0.7m	
	DORI Distance	Detect	65m(213ft)
	Observe	26m(85ft)	
	Recognize	6m(19ft)	
	Identify	6m(19ft)	
Certifications	CE (EN 60950:2000) UL:UL60950-1 FCC: FCC Part 15 Subpart B		
Audio	Operating Conditions	-30° C ~ +60° C (-22° F ~ +140° F) / Less than 95% RH	
	Storage Conditions	-30° C ~ +60° C (-22° F ~ +140° F) / Less than 95% RH	
Construction	Casing	Metal	
	Dimensions	30mm×31mm×32.4mm (1.18"×1.22"×1.28")	
	Net Weight	0.40Kg (0.88lb)	
	Gross Weight	0.47Kg (1.03lb)	